


FORM PTO-1390 (REV 11-2000)	U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 540-317
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 09/914838
INTERNATIONAL APPLICATION NO. PCT/GB00/00729	INTERNATIONAL FILING DATE 1 March 2000	PRIORITY DATE CLAIMED 1 March 1999 28 July 1999
TITLE OF INVENTION HEAD TRACKER SYSTEM		
APPLICANT(S) FOR DO/EO/US BARTLETT		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The U.S. has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. A copy of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input checked="" type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> A English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 To 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.</p> <p>13. <input type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information. PTO-1449 FORM</p>		

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.06) 09/914830		INTERNATIONAL APPLICATION NO. PCT/GB00/00729		ATTORNEY'S DOCKET NUMBER 540-317	
21. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5)): -- Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00 -- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO\$860.00 -- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO\$710.00 -- International preliminary examination fee (37 C.F.R. 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00 -- International preliminary examination fee (37 C.F.R. 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)\$100.00				ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).				\$ 130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	17	-20 = 0	X \$18.00	\$ 0.00	
Independent Claims	3	-3 = 0	X \$80.00	\$ 0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)				\$270.00	\$ 0.00
TOTAL OF ABOVE CALCULATIONS =				\$ 990.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ 0.00	
SUBTOTAL =				\$ 990.00	
Processing fee of \$130.00, for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(f)).				\$ 0.00	
TOTAL NATIONAL FEE =				\$ 990.00	
Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property				\$	0.00
Fee for Petition to Revive Unintentionally Abandoned Application (\$1240.00 - Small Entity = \$620.00)				\$	0.00
TOTAL FEES ENCLOSED =				\$ 990.00	
				Amount to be: refunded	\$
				Charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$990.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 14-1140 in the amount of \$_____ to cover the above fees. A duplicate copy of this form is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 14-1140. A duplicate copy of this form is enclosed. d. <input checked="" type="checkbox"/> The entire content of the foreign application(s), referred to in this application is/are hereby incorporated by reference in this application.					
NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: NIXON & VANDERHYP P.C. 1100 North Glebe Road, 8 th Floor Arlington, Virginia 22201-4714 Telephone: (703) 816-4000					
 SIGNATURE					
Stanley C. Spooner NAME					
27.393 REGISTRATION NUMBER		September 4, 2001 Date			

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

BARTLETT

Atty. Ref.: 540-317

National Phase of Intl Appln. No. PCT/GB00/00729 Group:

(Filed: 1 March 2000)

Examiner:

For: HEAD TRACKER SYSTEM

* * * * *

September 4, 2001

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

PRELIMINARY AMENDMENT

Please amend the above-identified application as follows:

IN THE CLAIMS

Please substitute the following amended claims for corresponding claims previously presented. A copy of the amended claims showing current revisions is attached.

3. (Amended) A head tracker according to Claim 1 in which the, or each, distinguishable marking (18a-18j) comprises a spatial pattern.

4. (Amended) A head tracker system according to Claim 1 in which the, or each, distinguishable marking (18a-18j) is defined in part at least by the colour of the marking.

5. (Amended) A head tracker system according to Claim 1 and further comprising one or more marking generators (18a-18j) for generating the distinguishable markings.

7. (Amended) A head tracker according to Claim 1 in which each marking is a substantially collimated image having an axis (20a-20j) which is predetermined and which passes through said respective known fixed point.

8. (Amended) A head tracker system according to Claim 1 in which the plurality of markings comprises features of the environment around the user.

9. (Amended) A head tracker system according to Claim 1 in which the optical correlator (26) is operable to sequentially, optically correlate the optical image from the optical sensor with an optical image representative of each of the markings.

10. (Amended) A head tracker system according to Claim 1 in which the means (28) for determining the orientation of the head mounting (2) determines the head mounting orientation by determining where within the field of view of the optical sensor a marking is located.

11. (Amended) A head tracker system according to Claim 1 in which the optical sensor (12) comprises a video camera for capturing the optical image and producing an electrical signal representative of it and converting the electrical signal back to an optical image.

12. (Amended) A head tracker system according to Claim 1 and further comprising a second optical sensor located at a second known fixed point relative to the head mounting or to the fixed datum.

13. (Amended) A head tracker system according to Claim 1 in which the optical correlator (26) is a Vander Lugt type correlator.

14. (Amended) A head tracker system according to Claim 1 in which the optical correlator (28) is of the joint transform type.

17. (Amended) A head tracker system according to Claim 15 and further comprising providing one or more visibly distinguishable markings (18a- 18j) at respective known points which are fixed relative to the datum (22).


REMARKS

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page/s is/are captioned "**Version With Markings To Show Changes Made.**"

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: _____


Stanley C. Spooner
Reg. No. 27,393

SCS:tat
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS

3. (Amended) A head tracker according to Claim 1 [or Claim 2] in which the, or each, distinguishable marking (18a-18j) comprises a spatial pattern.

4. (Amended) A head tracker system according to [any preceding claim] Claim 1 in which the, or each, distinguishable marking (18a-18j) is defined in part at least by the colour of the marking.

5. (Amended) A head tracker system according to [any preceding claim] Claim 1 and further comprising one or more marking generators (18a-18j) for generating the distinguishable markings.

7. (Amended) A head tracker according to [any preceding claim] Claim 1 in which each marking is a substantially collimated image having an axis (20a-20j) which is predetermined and which passes through said respective known fixed point.

8. (Amended) A head tracker system according to Claim 1 [or any one of Claims 3 to 7 when dependent on Claim 1] in which the plurality of markings comprises features of the environment around the user.

9. (Amended) A head tracker system according to [any preceding claim]

Claim 1 in which the optical correlator (26) is operable to sequentially, optically correlate the optical image from the optical sensor with an optical image representative of each of the markings.

10. (Amended) A head tracker system according to [any preceding claim]

Claim 1 in which the means (28) for determining the orientation of the head mounting (2) determines the head mounting orientation by determining where within the field of view of the optical sensor a marking is located.

11. (Amended) A head tracker system according to [any preceding claim]

Claim 1 in which the optical sensor (12) comprises a video camera for capturing the optical image and producing an electrical signal representative of it and converting the electrical signal back to an optical image.

12. (Amended) A head tracker system according to [any preceding claim]

Claim 1 and further comprising a second optical sensor located at a second known fixed point relative to the head mounting or to the fixed datum.

13. (Amended) A head tracker system according to [any preceding claim]

Claim 1 in which the optical correlator (26) is a Vander Lugt type correlator.

14. (Amended) A head tracker system according to [any one of Claims 1 to 12] Claim 1 in which the optical correlator (28) is of the joint transform type.

17. (Amended) A head tracker system according to Claim 15 [or Claim 16] and further comprising providing one or more visibly distinguishable markings (18a- 18j) at respective known points which are fixed relative to the datum (22).

2pt

Head Tracker System

This invention relates to a head tracker system and more especially, although not exclusively, to a head tracker system for use in an aircraft in which the pilot is provided with a helmet-mounted display.

5 Head tracker systems are well known and operate to determine a user's head orientation and position relative to a fixed datum. Originally these systems were developed for use in military aviation but have recently found applications in virtual reality systems.

10 Since the earliest days of military aviation, pilots have not surprisingly preferred to navigate and aim weapons whilst looking up and out of the cockpit. This led to the evolution of the head-up display (HUD) which displays useful symbology which is appropriately referenced to the outside world (often termed "space stabilised"). HUDs typically have a viewing angle of thirty degrees or less and can consequently only be viewed when the pilot is looking in a generally forward direction. To increase the field
15 of regard (that is the total volume of space over which the pilot can view the symbology and includes the pilot moving his head), helmet-mounted displays (HMDs) have evolved which essentially comprise a HUD which is mounted on the pilot's helmet within his field of view. In order that ground stabilized symbols or imagery are presented to the pilot in the correct orientation with respect to the outside world, the symbol generator of
20 the HUD must know in all three axes, that is elevation, azimuth and roll, where the pilot's head is directed. This is achieved by determining (a) the angular orientation of the pilot's head with respect to the aircraft axes and (b) the orientation (attitude) of the

aircraft with the outside world. The former requirement has led to the need for a head tracker system. HMDs operate in conjunction with the head tracker system which determines the angular orientation of the user's head with respect to the aircraft axes to ensure that the displayed information is correctly aligned in space or is accurately superimposed against objects in the outside world. For example, in the case of military aviation it is essential that a weapon aiming marker is accurately aligned over the target.

Typically, a head tracker system comprises a head mounting, most commonly a helmet, which is attached to the user's head and a sensor system for determining the angular orientation of the helmet relative to a fixed reference datum. Although strictly speaking a head tracker system actually tracks the orientation of the head mounting and not the user's head, it provides an accurate measure of the user's head orientation provided the head mounting remains in a fixed orientation relative to the user's head.

The reference datum is typically three axes which pass through a known point on the vehicle or airframe. A number of sensor systems have been proposed. For example, early tracking systems used mechanical linkages between the helmet and the vehicle and, whilst such systems were relatively accurate, they were cumbersome, restricted the user's movement and posed particular problems during ejection from an aircraft. Further systems include optical sensor systems in which the helmet carries a number of light emitting diodes operating in the infra-red which are detected by position sensitive detectors which are mounted to the vehicle cockpit. Other known optical systems use visually distinctive physical markings which are detected by a camera. Magnetic sensor systems are also known in which an alternating or pulsed magnetic field is detected by

sensors on the helmet. Inertial systems have been proposed which use gyroscopes and accelerometers; and hybrid systems which involve a combination of two or more of the above systems.

5 A particular requirement of a head tracker system for use in military aviation is high accuracy coupled with a fast dynamic response as the pilot's head movements are often extremely rapid; typically these can be greater than two hundred degrees per second. These two requirements are often mutually exclusive and the known tracker systems are a compromise in achieving these objectives. For example, although inertial systems
10 based on gyroscopes have a very fast dynamic response, the accuracy of these systems is limited by drift over extended periods of operation. Tracker systems which are based on magnetic sensors, although accurate, do not provide a fast enough dynamic response because of the slow settling times of the magnetic fields. Although inherently fast enough, the accuracy of optical systems is constrained by the large amount of electronic
15 processing required. The latency in data processing in most tracker systems is further compounded by the additional lag introduced by the filtering needed to minimise the effect of noise on the often very low levels of signals being detected. In an attempt to overcome these problems it has been proposed to have tracker systems which are hybrid systems and which involve a combination of two of the above systems such as, for
20 example, an inertial system to provide the dynamic response which is supplemented by a magnetic system for long term accuracy.

The present invention has arisen in an endeavour to provide a system which, at least in part, overcomes the limitations of the known head tracker systems.

According to the present invention a head tracker system for determining a user's head orientation relative to a datum comprises: a head mounting for attachment to the user's head; an optical sensor which in use is located in fixed relation with a known fixed point relative to the head mounting; a plurality of distinguishable markings each of which when in use is located in fixed relation with a respective known point which is fixed relative to the datum; characterised by an optical correlator for optically correlating the optical image from the optical sensor with an optical image representative of at least one of said markings; and means for determining the orientation of the head mounting using the output from the optical correlator when it detects that there is correlation between the images.

It will be appreciated that the location of the distinguishable markings and optical sensor can be interchanged and thus according to a second aspect of the invention a head tracker system for determining a user's head orientation relative to a datum comprises: a head mounting for attachment to the user's head; a plurality of distinguishable markings each of which when in use is located in fixed relation with a respective known point which is fixed relative to the head mounting; an optical sensor which in use is located in fixed relation with a known fixed point relative to the datum; characterised by an optical correlator for optically correlating the optical image from the optical sensor with an optical image representative of at least one of said markings; and means for determining the orientation of the head mounting using the output from the optical correlator when it detects that there is correlation between the images.

Unlike the known tracker systems which use electronic processing (e.g. fast Fourier

transforms), the tracker system of the present invention has a fast dynamic response as a substantial part of the processing is carried out optically.

In the context of this patent application the term "marking" is intended to have a broad meaning and includes any symbol, marker, pattern or feature which is physically applied or otherwise generated which defines a spatial and/or angular reference.

The distinguishable markings can comprise a spatial pattern such as, for example, a cross, circle, diamond, triangle or other simple pattern. To assist in discriminating between the presence of markings and the rest of the optical image the distinguishable markings can additionally be defined in part at least by their colour. The only requirement of the marking is that it is unambiguously recognisable and in one embodiment it is envisaged that the plurality of markings comprises features of the environment around the user, said features being fixed relative to the datum such as for example a part of the cockpit structure or instrumentation in the case of an aircraft. In such a system the optical correlator optically correlates the optical image from the optical sensor with optical images representative of the environment around the user. To increase the visibility of the markings it is preferred for them to be defined using a retroreflective material.

Alternatively the head tracker further comprises one or more marking generators for generating the markings. With such a generator/s the colour of marking is conveniently defined by the wavelength of light produced by each marking generator. To reduce the visual impact the markings may have on the user it is preferred to select the wavelength

of the light to be in a non-visible part of the electromagnetic spectrum, most conveniently in the infra red region.

In one embodiment each visual marking is a collimated image having an axis which is predetermined and which passes through said respective known fixed point. When using such markings the optical sensor is preferably focussed at infinity such that the markings are only visible when the axis of the field of view of the optical sensor and the axis of the marking are substantially coincident. To provide an accurate measure of the head mounting orientation in such a system a large number of markings are required. As an alternative, or in addition, additional sensors such as accelerators or gyroscopes can be mounted to the head mounting to measure the relative change of its orientation to the known orientations determined from the markings.

For markings which are not in the form of collimated images the means for determining the orientation of the head mounting is further operable to determine where within the field of view of the optical sensor a marking is located.

In a preferred implementation the optical sensor comprises a video camera, such as a charge coupled device (CCD), for capturing the optical image and converting it to an electrical signal. When using a video camera or other optical sensor which produces an electrical output the tracker further comprises means for converting the electrical signal back to an optical image. Such an arrangement enables the optical correlator to be mounted remotely from the head mounting. To further increase the accuracy of the system a second optical sensor is provided at a second known fixed point relative to the

head mounting or fixed datum.

Preferably the optical correlator is a Vander Lugt or joint transform type correlator and the means for converting the electrical signal back to an optical image comprises one of the spatial light modulators of the optical correlator. Advantageously the optical correlator is operable to sequentially optically correlate the optical image from the optical sensor with an optical image representative of each of the markings or optical images representative of the environment around the user. As an alternative, or in addition, further optical correlators can be provided each of which is dedicated to detecting one or more of the markings.

According to a further aspect of the invention a head tracker system for determining a user's head orientation relative to a datum comprises: a head mounting for attachment to the user's head; characterised by an optical sensor which in use is located at a known point fixed relative to the head mounting and operable to collect optical scene data representative of the user's environment; an optical correlator for correlating said optical scene data with optical scene data previously captured by said optical sensor to determine the relative movement of the head mounting between the capture of said optical scene data; and means for determining the orientation of the head mounting from said relative movements.

In accordance with a particularly preferred embodiment for use in an aircraft, said environment comprises at least a part of the cockpit such as the instrumentation. To further assist in the optical correlation process and to provide a method of determining

an absolute measure of the orientation of the head mounting relative to the datum it is preferred to provide one or more distinguishable markings at respective known points which are fixed relative to the datum.

- 5 A head tracker system in accordance with the invention will now be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a schematic representation of a head tracker system in accordance with the invention; and

10

Figure 2 is a schematic representation of the optical correlator of the head tracker of Figure 1.

15

Referring to Figure 1 there is shown a head tracker system for use in a fixed wing aircraft which comprises a helmet 2 which constitutes a head mounting for attachment to a pilot's head. In a known manner the helmet 2 is provided with a visor 4 and internally the helmet is provided with a helmet mounted display (HMD) device (not shown) which is arranged to project a display onto a partially reflective inner surface of the visor 4 so that the display is superimposed upon at least a part of the view seen by the pilot through the visor 4. In an alternative arrangement the HMD device can project a display onto discrete eye pieces which are located within the line of sight of the pilot. As is known the symbology displayed on the HMD generated by a symbol generator 6 which is located within the aircraft. The symbology is appropriately referenced in dependence on the user's head orientation which is determined by a processor 28 which is described

20

below. The signals used to drive the HMD are passed to the helmet along an umbilical cord 8 which is provided with a quick release connector arrangement 10 fixed inside the cockpit.

5 A miniature charged coupled device (CCD) colour video camera 12 is rigidly mounted to the helmet 2. The axis 14 of the field of view of the video camera is accurately aligned to a set reference axis within the helmet 2. The camera 12 is focussed at infinity (in the context of the present invention infinity, in practical terms, corresponds to four metres or more) or slightly less to compensate for any effect the canopy windshield 16
10 may have. The resolution of the camera is of VGA standard, that is six hundred and forty five by four hundred and eighty pixels.

Mounted around the cockpit at fixed known locations are a number of marking generators 18a to 18j (for clarity only ten are represented in Figure 1). Each marking
15 generator 18, which comprises a light emitting diode and collimator, produces a collimated beam of light of a pre-selected wavelength containing a symbol or pattern which is unique to the generator and which is accurately aligned with a respective known axis 20. For example 18a produces a circle, 18b produces a cross, 18c produces a diamond and so forth. In the embodiment described this wavelength is selected to be
20 within a visible part of the electromagnetic spectrum though in an alternative embodiment the wavelength can be selected to be within a non-visible part of the spectrum such as the infra red region. The advantage of the latter is that the marking generators are less likely to distract the pilot when they are operational. As described each marking generator 18 produces its own unique distinguishable marking which is

accurately aligned along a predetermined axis 20 which passes through a point which is accurately known relative to a set fixed reference datum (x,y,z) 22. As will be appreciated the marking can be any form of distinguishable marking and the only requirement is that the generator can be unambiguously identified from the spatial pattern it generates. Thus, each generator 18 produces a unique distinguishable symbol or pattern indicative of a known position and orientation.

As will now be described, the marking generators 18a-j, in conjunction with the camera 12, are used to determine the position and orientation of the helmet 2 relative to the aircraft reference datum 22.

The video signal from the camera 12 is passed down the umbilical cord 8 and applied via a wavelength selective filter 24 to one input of an optical correlator 26 which processes the information to identify when one of the markings passes through the field of view of the camera 12. The wavelength selective filter 24 is used to discriminate any marking from the rest of the video image of the scene. The operation of the optical correlator 26 is described below. When the optical correlator 26 detects and identifies which marking has passed through the camera's field of view the system knows that the camera 12 and hence the helmet 2 were oriented in a known direction when that video frame was captured. From this information the position of the helmet 2 can be determined by a processor 28 and the movement of the pilot's head relative to the reference datum 22 determined and tracked.

Referring to Figure 2 there is shown a schematic representation of the optical correlator

26, which is of a known type, often termed a Vander Lugt correlator. As is known the correlator 26 comprises an input spatial light modulator (SLM) 32 for inputting the image captured by the camera 12, a reference SLM 34 for inputting the image with which the first image is to be optically correlated; two polarising beam splitters 36, 38, two half wave plates 40, 42, four Fourier lenses 44, 46, 48, 50, a laser diode 52, a beam expander 54 and a CCD camera 56 for measuring the output of the correlator 26. The operation of optical correlators is well known and accordingly their operation will not be discussed in detail.

10 In operation the processor 28 has stored images (in the form of a video signal) which are representative of each of the distinguishable markings and it applies each of these sequentially to the reference SLM 34 such that the correlator 26 optically correlates each frame captured by the video camera 12 with an image representative of each of the possible markings. As is known the two SLMs 32, 34 optically encode the video signals onto a coherent collimated laser beam generated by the laser diode 52 and beam expander 54. These coherent optical images are Fourier transformed by the Fourier lenses 44, 46 at their focal (Fourier) plane. Since the images created are coherent with each other, they constructively interfere where they are the same resulting in a set of correlation peaks which are in the form of spots of light whose location indicates where the two images are the same and whose intensity shows how similar the images are. This set of correlation peaks is detected by the CCD camera 56 once they have been reverse transformed by the Fourier lenses 48, 50. The output of the camera 56 is used by the processor 28 to detect when one of the markings passes through the field of view of the camera 12 and hence which marking generator produced it. From this information the

processor can determine the orientation of the helmet 2 at the time when the video image was captured. Since a large proportion of the processing is carried out optically the tracker system has an extremely fast dynamic response.

- 5 It will be appreciated that since the markings are in the form of a collimated image and the camera is focussed at infinity, a given marking will only be visible to the camera when the axis of the field of view of the camera and the axis of the respective marking are coincident. In order to provide the required accuracy of measurement of the orientation of the helmet it is preferred for the helmet to additionally include movement
- 10 sensors such as accelerators or gyroscopes to measure the relative movement of the helmet between the known orientations provided by the markings. Alternatively and depending on the application the resolution of the system can be increased by increasing the number of marking generators and/or the number of cameras.
- 15 In a further alternative arrangement markings are used which are not in the form of a collimated image such as for example an arrangement of uncollimated light source or physical markings which can be defined spatially and/or by their colour. When using such markings the camera is focussed on the near field. Since such markings will be within the field of view of the camera for possibly some considerable time the optical
- 20 correlator is operable to not only detect for the presence of the or each marking, but also to determine where it is within the field of view of the camera in order to accurately determine the head mounting orientation. In order to recognise markings when they are off axis the processor is operable to generate skewed images of the markings. As a further alternative to using a plurality of deliberately provided applied markings it is also

envisaged to utilise distinguishable features already present in the environment surrounding the user such as the cockpit in the example described. With such an arrangement the optical correlator is operable to optically correlate the scene data captured by the camera with scene data representative of the user's environment from 5 different known orientations e.g. pre-captured features of the cockpit.

In yet a further embodiment the optical correlator is operable to optically correlate the current scene data from the video camera with scene data which was previously captured by the camera to determine the relative movement of the head mounting during the 10 interval between the capture of the data. Such a system eliminates the need for pre-recording, pre-capturing, optical images representative of each marking or representative features of the user's environment from known orientation. In such a system however it is still advantageous to further include one or more intentionally applied distinguishable markings at known fixed locations to initially reference the system and/or 15 update the system during operation. It will be appreciated that, for such a system to continue to track the user's head movement effectively, consecutive optical images which are to be correlated must contain features common to each. In the case of military aircraft the pilot's head movement can be as rapid as two hundred degrees a second and thus with a video camera having a five degree field of view and a frame rate of two 20 hundred and twenty-five frames per second at least five consecutive video images should contain features common to each. To further increase the reliability of the tracker it is preferred to provide one or more additional cameras at different fixed orientation and to correlate the optical images produced by each.

It will be appreciated that the present invention is not restricted to the specific embodiments described and that modifications can be made which are within the scope of the invention. For example the axis of the field of view of the camera is accurately aligned with a known reference axis in the helmet. In one arrangement this axis is set to additionally correspond to the forward looking direction of the pilot such that the video output from the camera is representative of the view seen by the pilot minus the symbology generated by the HMD. The video signal is additionally applied to a video processor where it is combined with the symbology from the HMD symbol generator to form a facsimile of the view seen by the pilot. This composite image is recorded on a video recorder and used after the flight to evaluate the pilot's performance.

For example, in any of the embodiments the video camera can be mounted in the cockpit and the markings and/or marking generators mounted on the helmet. In the case of a system which correlates optical scene data the helmet would additionally include features such as for example a bar code arrangement.

To further increase the dynamic response of any of the systems it is preferred to use two or more cameras, for example one on each side of the helmet with additional optical correlators to correlate the output of the additional cameras with the reference symbols.

Furthermore the number and type of markings can be varied, provided that each is an image which is distinguishable and which can unambiguously identified. Accordingly in yet a further embodiment one or more of the markings can be generated using a head-up display in place of or in addition to the separate marking generators.

In the specific embodiment described the output of the video camera 12, which comprises an electrical video signal, is passed down the umbilical cord 8 to the optical correlator 26, thereby eliminating the need to mount the correlator on the helmet 2. With such an arrangement the processing speed of the system, whilst quick, is currently limited to the frame rate of the camera, that is two hundred and twenty frames per second. In an alternative tracker system the video camera can be dispensed with and the optical image fed directly to the optical correlator via, for example, the umbilical cord 8 which could include one or more optical fibres. To further increase the dynamic response it is also envisaged to provide one or more optical correlators each dedicated to one or two markings such that substantially continuous optical processing can be achieved. It will be further appreciated that other forms of optical correlator can be used such as a joint transform type which has the advantage of only requiring a single spatial light modulator (SLM) onto which the input and reference images can be displayed side by side. Although the tracker system has been described in relation to a fixed wing aircraft it can be applied equally to other vehicles or any application where it is required to track a user's head movement relative to a fixed datum. In summary it is believed the present invention resides in a head tracker system which uses the optical correlation to determine the user's head orientation relative to the fixed datum.

CLAIMS

1. A head tracker system for determining a user's head orientation relative to a datum (22) comprising: a head mounting (2) for attachment to the user's head; an optical sensor (12) which in use is located in fixed relation with a known fixed point relative to the head mounting (2); a plurality of distinguishable markings (18a-18j) each of which when in use is located in fixed relation with a respective known point which is fixed relative to the datum (22); characterised by an optical correlator (26) for optically correlating the optical image from the optical sensor (12) with an optical image representative of at least one of said markings (18a-18j); and means (28) for determining the orientation of the head mounting using the output from the optical correlator when it detects that there is correlation between the images.
2. A head tracker system for determining a user's head orientation relative to a datum (22) comprising: a head mounting (2) for attachment to the user's head; a plurality of distinguishable markings (18a-18j) each of which when in use is located in fixed relation with a respective known point which is fixed relative to the head mounting; an optical sensor (12) which in use is located in fixed relation with a known fixed point relative to the datum (22); characterised by an optical correlator (26) for optically correlating the optical image from the optical sensor (12) with an optical image representative of at least one of said markings (18a-18j); and means (28) for determining the orientation of the head mounting (2) using the output from the optical correlator (26) when it detects that there is

correlation between the images.


3. A head tracker according to Claim 1 or Claim 2 in which the, or each, distinguishable marking (18a-18j) comprises a spatial pattern.
4. A head tracker system according to any preceding claim in which the, or each, distinguishable marking (18a-18j) is defined in part at least by the colour of the marking.
5. A head tracker system according to any preceding claim and further comprising one or more marking generators (18a-18j) for generating the distinguishable markings.
6. A head tracker system according to Claim 5 in which the colour of the markings (18a-18j) is defined by the wavelength of the light produced by each marking generator.
7. A head tracker according to any preceding claim in which each marking is a substantially collimated image having an axis (20a-20j) which is predetermined and which passes through said respective known fixed point.
8. A head tracker system according to Claim 1 or any one of Claims 3 to 7 when dependent on Claim 1 in which the plurality of markings comprises features of the environment around the user.

9. A head tracker system according to any preceding claim in which the optical correlator (26) is operable to sequentially, optically correlate the optical image from the optical sensor with an optical image representative of each of the markings.
10. A head tracker system according to any preceding claim in which the means (28) for determining the orientation of the head mounting (2) determines the head mounting orientation by determining where within the field of view of the optical sensor a marking is located.
11. A head tracker system according to any preceding claim in which the optical sensor (12) comprises a video camera for capturing the optical image and producing an electrical signal representative of it and converting the electrical signal back to an optical image.
12. A head tracker system according to any preceding claim and further comprising a second optical sensor located at a second known fixed point relative to the head mounting or to the fixed datum.
13. A head tracker system according to any preceding claim in which the optical correlator (26) is a Vander Lugt type correlator.
14. A head tracker system according to any one of Claims 1 to 12 in which the

optical correlator (28) is of the joint transform type.


15. A head tracker system for determining a user's head orientation relative to a datum (22) comprising: a head mounting (2) for attachment to the user's head; characterised by an optical sensor (12) which in use is located at a known point fixed relative to the head mounting (2) and operable to collect optical scene data representative of the user's environment; an optical correlator (26) for correlating said optical scene data with optical scene data previously captured by said optical sensor to determine the relative movement of the head mounting (2) between the capture of said optical scene data; and means (28) for determining the orientation of the head mounting from said relative movements.
16. A head tracker system according to Claim 15 when used in an aircraft in which the environment comprises at least a part of the cockpit.
17. A head tracker system according to Claim 15 or Claim 16 and further comprising providing one or more visibly distinguishable markings (18a- 18j) at respective known points which are fixed relative to the datum (22).

Fig. 1.

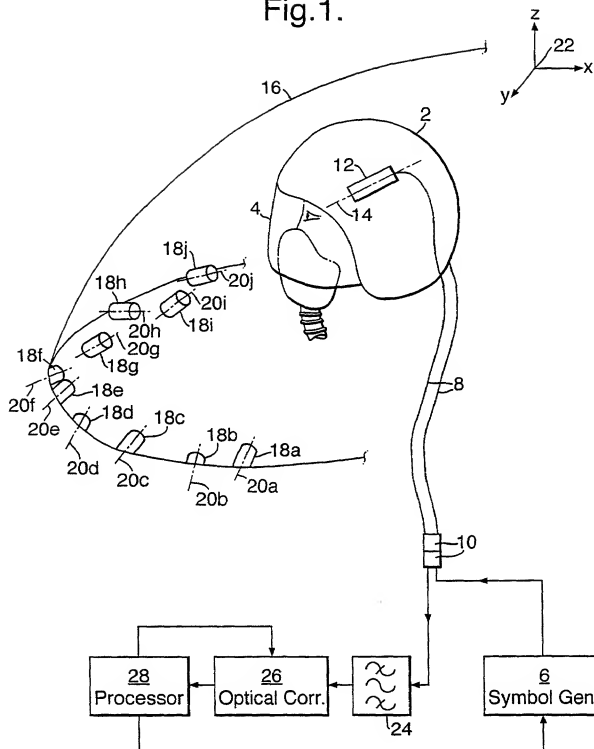

2/2

Fig.2.

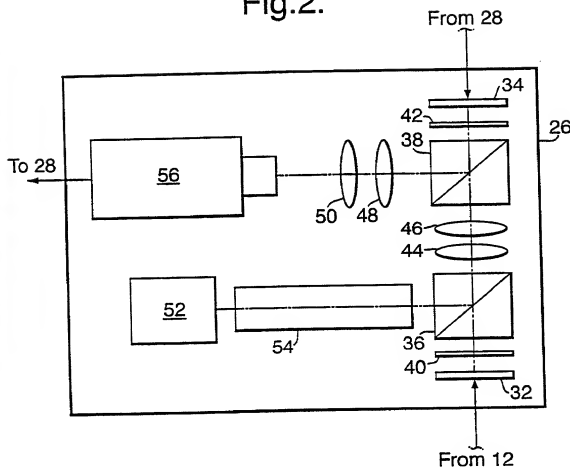

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

HEAD TRACKER SYSTEM

the specification of which (check applicable box(es)):

☐ is attached hereto
☐ was filed on _____ as U.S. Application Serial No. _____
☒ was filed as PCT International application No. PCT/GB00/00729 on 01 MARCH 2000
 and (if applicable to U.S. or PCT application) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed or, if no priority is claimed, before the filing date of this application:

Priority Foreign Application(s):

Application Number
 9904669.0
 9917582.0

Country
 GB
 GB

Day/Month/Year Filed
 01 MARCH 1999
 28 JULY 1999

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

Application Number _____ Date/Month/Year Filed _____

I hereby claim the benefit under 35 U.S.C. 120/365 of all prior United States and PCT international applications listed above or below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior applications in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s):

Application Serial No. _____

Day/Month/Year Filed _____

Status: patented
 pending, abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. And I hereby appoint **NIXON & VANDERHYE P.C., 1100 North Glebe Rd., 8th Floor, Arlington, VA 22201-4714, telephone number (703) 816-4000** (to whom all communications are to be directed), and the following attorneys thereof (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent: **Arthur R. Crawford, 25322; Larry S. Nixon, 25540; Robert A. Vanderhye, 27078; James T. Hosmer, 39484; Robert W. Faris, 31352; Richard G. Basha, 22270; Mark E. Nusbaur, 32348; Michael J. Keenan, 32108; Bryan H. Davidson, 30251; Stanley C. Spooner, 27393; Leonard C. Mitchard, 29009; Duane M. Byers, 33363; Paul J. Henon, 33826; Jeffrey H. Nelson, 30484; John R. Lastova, 33149; H. Warren Burnam, Jr. 29366; Thomas E. Byrne, 32205; Mary J. Wilson, 32955; J. Scott Davidson, 33489; Alan M. Kagen, 36178; William J. Griffin, 31260; Robert A. Molan, 29634; B. J. Sadoff, 36663; James D. Berodist, 24776; Updeep S. Gill, 37334.**

1. Inventor's Signature: Christopher T. Bartlett Date: 4th Sept 2001
 Inventor: Christopher (first) MI BARTLETT (last) British (citizenship)
 Residence: (city) Maldstone (state/country) Kent, United Kingdom
 Post Office Address: 83 Abingdon Road, Barming, Maldstone, Kent, ME16 9EH, United Kingdom
 (Zip Code) ME16 9EH

2. Inventor's Signature: _____ Date: _____
 Inventor: _____ (first) MI _____ (last) _____ (citizenship)
 Residence: (city) _____ (state/country) _____
 Post Office Address: _____
 (Zip Code) _____

FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information and signature and date for each.